

INEEDROBOT LANDSCAPING PRODUCT CATALOGUE

iNeedRobot




www.ineedrobot.eu



ineedrobot@roboti-adria.eu



INEEDROBOT POWERED BY FJDYNAMICS

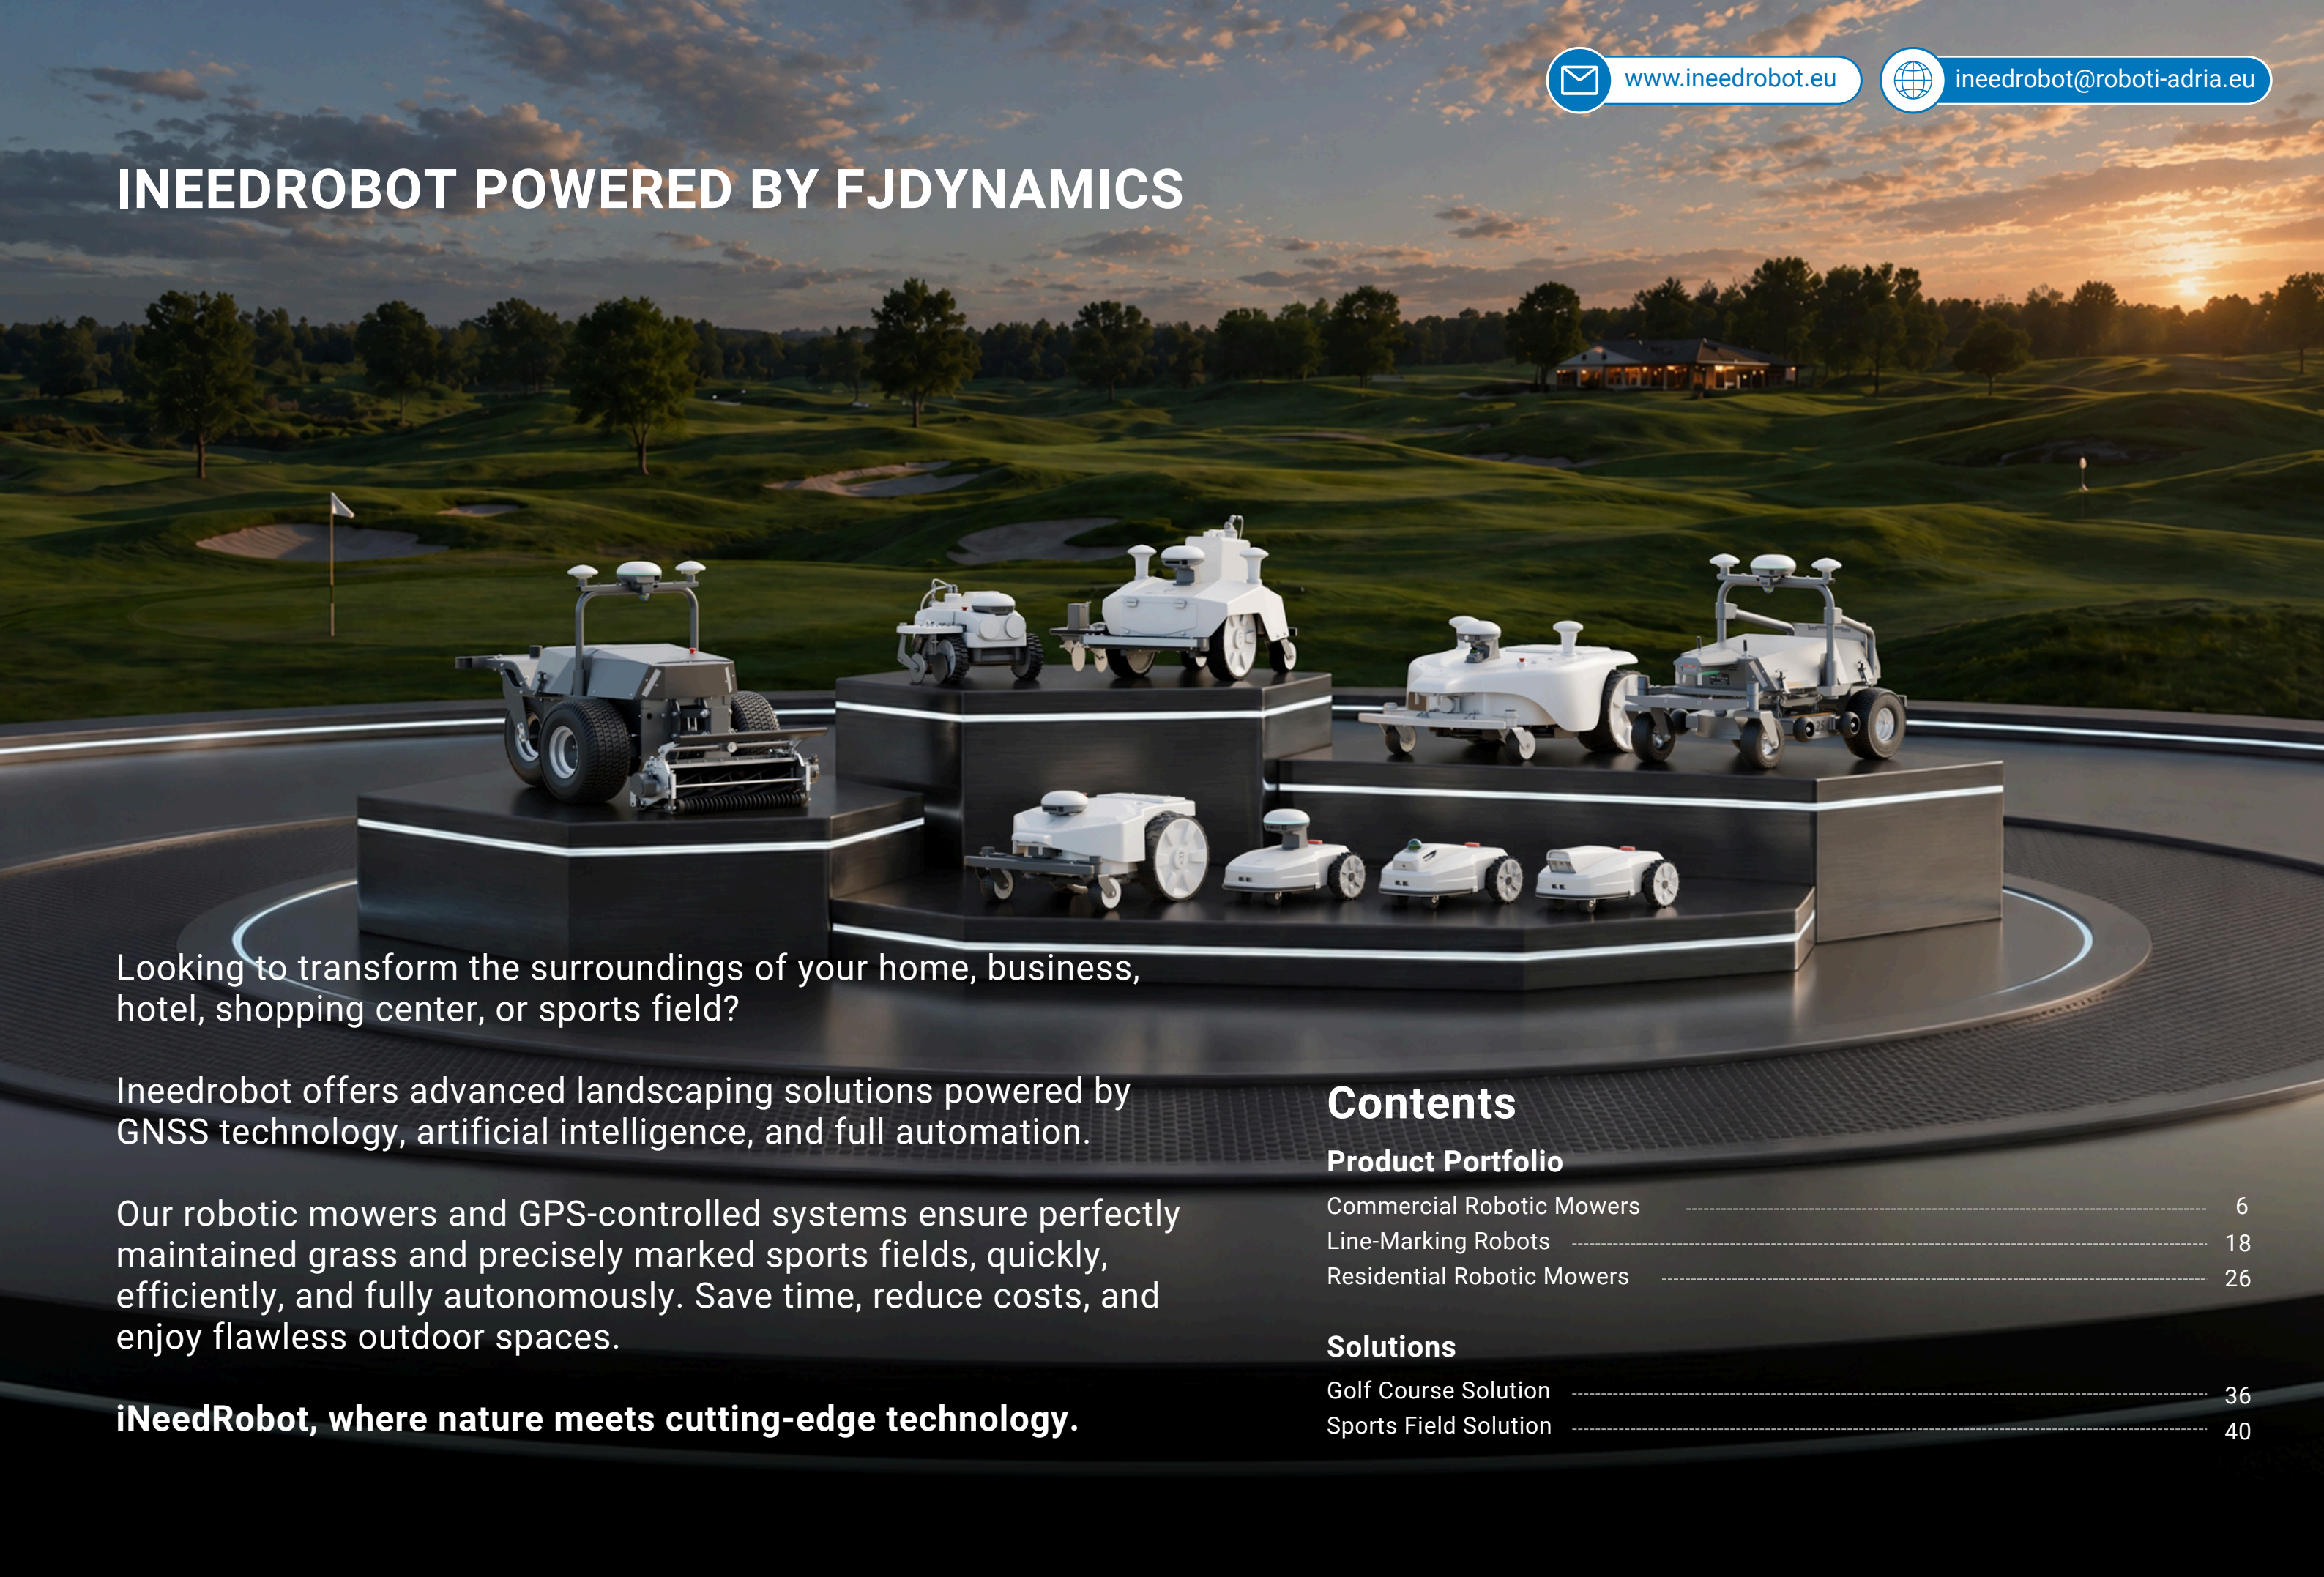

Looking to transform the surroundings of your home, business, hotel, shopping center, or sports field?

Ineedrobot offers advanced landscaping solutions powered by GNSS technology, artificial intelligence, and full automation.

Our robotic mowers and GPS-controlled systems ensure perfectly maintained grass and precisely marked sports fields, quickly, efficiently, and fully autonomously. Save time, reduce costs, and enjoy flawless outdoor spaces.

iNeedRobot, where nature meets cutting-edge technology.

Contents

Product Portfolio

Commercial Robotic Mowers	6
Line-Marking Robots	18
Residential Robotic Mowers	26

Solutions

Golf Course Solution	36
Sports Field Solution	40



Commercial Robotic Mowers



RCM01



RM21



Titan



FRX



RCM01

Robotic Cylinder Mower

Perfection on Every Blade. Autonomy in Every Corner.

Precision Cutting

Achieve clean, scissor-like cuts with a reel cutting system, minimizing leaf tearing and promoting healthier turf growth.

Dynamic Terrain Adaptability

The floating cutting unit automatically follows turf contours, helping maintain a consistent cut and prevent turf scalping.

Professional-Grade Striping

Creates clean, high-contrast stripes using precision rollers, with adjustable striping widths to match your course presentation.

Do More with Less

One operator can manage multiple mowers remotely, allowing teams to focus on higher-value work.

Reduce Labor Costs

by up to **90%**

Reduce Energy Costs

by up to **80%**



Specifications

Dimensions	1905 × 1077 × 1077 mm (75 × 42.4 × 42.4 in.)
Weight	365 kg (804.7 lb)
Max Mowing Area per Charge	20,000 m ² (5 acres)
Max Mowing Area in 24 Hours	30,000 m ² (7.4 acres)
Max Mowing Area in 72 Hours	90,000 m ² (22.2 acres)
Cutting Height	7–44 mm (0.28–1.73 in.)
Cutting Width	685 mm (27 in.)
Battery Capacity	8 kWh
Runtime per Charge	10 h
Charging Time	5 h
Max Working Slope	15°
Sensors	RTK, LiDAR, Vision
IP Rating	IPX4



RM21

Multi-Functional Robotic Mower

All-in-One Solution for a New Era of Turf Care.

One Machine, Multiple Applications

Quickly switch between kits to handle mowing, line marking, grass collecting, ball picking, and dew brushing with one machine.

Reliable Operation in Weak-Signal Areas

RTK and LiDAR work together to support reliable operation under trees and in other weak-signal areas.

Multi-Zone Management

Assign one task across multiple zones, making it easier to manage large golf courses and sports facilities.

Intelligent Path Planning

Plan optimal routes automatically within a defined work area, ensuring consistent turf maintenance.



Specifications

Dimensions	1330 × 853 × 980 mm (52.4 × 33.6 × 38.6 in.)
Weight	170 kg (375 lb)
Max Mowing Area per Charge	12,000 m ² (3 acres)
Max Mowing Area in 24 Hours	Fast charging mode: 36,000 m ² (8.9 acres) Standard charging mode: 31,200 m ² (7.7 acres)
Max Mowing Area in 72 Hours	Fast charging mode: 108,000 m ² (26.7 acres) Standard charging mode: 93,600 m ² (23.1 acres)
Cutting Height	20–127 mm (0.8–5 in.)
Cutting Width	635 mm (25 in.)
Battery Capacity	4 kWh
Runtime per Charge	5 h
Charging Time	Standard 5 h / Fast charging 3 h
Max Working Slope	15°
Sensors	RTK, LiDAR, Vision
IP Rating	IPX4



RM21 + LM01 Line Marker Kit

- One-Tap Autonomous Operation
- Resume Line Marking Seamlessly
- Lower Input. Higher Field Output.
 - Reduce paint usage by 50%
 - Cut labor costs by up to 90%
 - Mark up to 20 full-size fields per charge



RM21 + BP01 Ball Picker Kit

- Full-Basket Detection & Auto-Return
- Cloud Scheduling for Full-Course Coverage
- Cut Manual Work Across the Range



RM21 + GC01 Grass Collector Kit

- Automated Grass Collection & Disposal
- Debris Collection on Artificial Turf
- Course-Grade Turf Striping



RM21 + DB01 Dew Brush Kit

- Automatic Lifting & Folding
- Customizable Brushing Direction
- Dew Brushing for Consistent Ball Roll



Specifications

LM01

Weight	68 kg (150 lb)
Dimensions	684 × 562 × 432 mm (27 × 22.1 × 17 in.)
Max Marking Speed	3 km/h (1.9 mph)
Paint Tank Capacity	25 L (5.5 gal)
Line Width Range	50–170 mm (2–6.7 in.)
Nozzle Height	30–80 mm (1.2–3.1 in.)
Max Marking Time per Charge	20 h
IP Rating	IPX4
Operating Temperature	5–35 °C

BP01

Weight	70 kg (154 lb)
Dimensions	1480 × 1120 × 590 mm (58.3 × 44.1 × 23.2 in.)
Picking Width	900 mm (35.4 in.)
Number of Baskets	2
Capacity per Basket	400 golf balls

GC01

Weight	100 kg (220 lb)
Dimensions	1260 × 960 × 740 mm (49.6 × 37.8 × 29.1 in.)
Collection Height Range	20–50 mm (0.8–2 in.)
Collection Width	800 mm (31.5 in.)
Max Travel Speed	3 km/h (1.9 mph)
Max Collection Volume	150 L (33 gal)
Max Climbing Ability	8°
IP Rating	IPX4
Operating Temperature	0–45 °C

DB01

Weight	28 kg (61.7 lb)
Length — Single Section	1000 mm / 39.4 in.
Length — Three Sections	2930 mm / 115.4 in.
Brush Lift	Supported
Brush Folding	Supported



Titan

Robotic Mower

Elite 2-in-1 Turf Care. Without the Elite Price.

Triple-Sensor Guidance System

Dual-antenna RTK GNSS, LiDAR, and Vision work together for stable positioning and obstacle avoidance.

Wide-Cut Productivity

The 730 mm (28.74 in.) cutting width supports high mowing output, covering 36,000 m² / 9 acres per day.

Adjustable Cutting Height

Adjust cutting height from 10–100 mm (0.4–4 in.) via the app to match turf type and season.

Titan + Line Marker Kit

Paired with the line marker kit, the Titan delivers exceptional line-marking precision and efficiency.

- Reduce paint usage by **50%+**
- Cut labor costs by up to **90%**
- Mark up to **10** standard soccer fields per charge



Specifications

Dimensions	1400 × 1050 × 650 mm (55.1 × 41.3 × 25.6 in.)
Weight	122 kg (287 lb)
Max Mowing Area per Charge	18,000 m ² (4.4 acres)
Max Mowing Area in 24 Hours	36,000 m ² (9 acres)
Max Mowing Area in 72 Hours	108,000 m ² (26.7 acres)
Cutting Height	10–100 mm (0.4–4 in.)
Cutting Width	730 mm (28.74 in.)
Battery Capacity	2 kWh
Runtime per Charge	8 h
Charging Time	2 h
Max Working Slope	25°
Sensors	RTK, LiDAR, Vision
IP Rating	IP64



FRX

Robotic Mower

Professional Turf Management Made Affordable.

Conquer 30° Slopes with Ease

With a high-performance motor and compact chassis, FRX supports stable mowing on slopes up to 30°.

10–100 mm Adjustable Cutting Height

Adjust the cutting height from 10–100 mm / 0.4–4 in. to suit roughs, sports fields, and seasonal turf conditions.

Flexible Charging Options

Fast battery swapping for 24/7 mowing. Auto-charging for fully unmanned operation.

Multi-Field Management

FRX can manage mowing tasks across multiple sports fields and move between assigned areas after each task is completed.

Specifications

Dimensions	1278 × 782 × 740 mm (50.3 × 30.8 × 29.1 in.)
Weight	83.7 kg (184.53 lb)
Max Mowing Area per Charge	8,000 m² (2 acres)
Max Mowing Area in 24 Hours	32,000 m² (8 acres)
Max Mowing Area in 72 Hours	96,000 m² (23.7 acres)
Cutting Height	10–100 mm (0.4–4 in.)
Cutting Width	520 mm (20.5 in.)
Battery Capacity	1 kWh
Runtime per Charge	320 min
Charging Time	240 min
Max Working Slope	30°
Sensors	RTK, Vision
IP Rating	IPX5



Robotic Line Markers



PaintMaster Pro



PaintMaster Mini




PaintMaster Ultra



PaintMaster Pro

Make Line Marking Easier

Factory-calibrated before delivery, so the machine is ready to start marking after arrival.

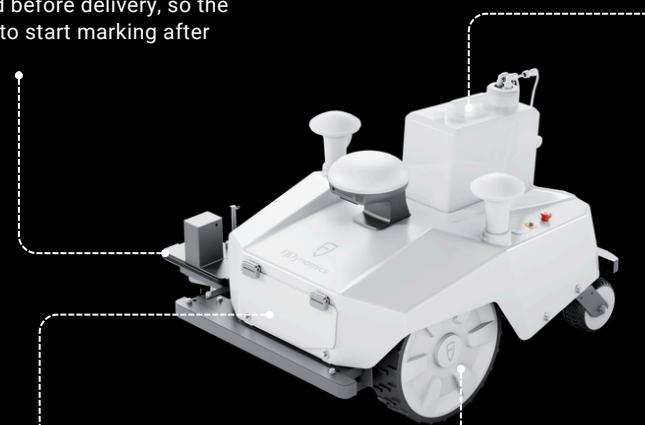

20 L standard paint tank, expandable to 25 L for continuous marking across multiple fields.

1 kWh battery supports extended runtime for frequent line-marking operations.

Standard studded tires help maintain traction on turf.




Real-Time Obstacle Detection & Avoidance | Fleet and Multi-Field Management

PaintMaster Mini

Built Light. Marks Right.

The lightweight body makes transport and field-to-field movement easier.

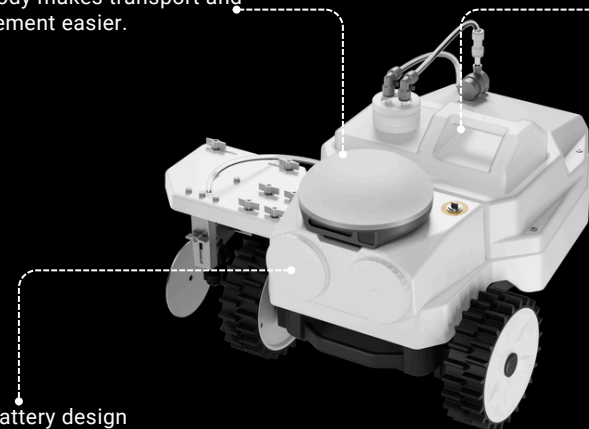

8 L paint tank balances marking efficiency with portability.

The quick-swap battery design minimizes downtime between tasks.





PaintMaster Pro

PaintMaster Mini

Dimensions	1074 x 1023 x 672 mm (42.3 x 40.3 x 26.5 in.)	656 x 655 x 453 mm (25.8 x 25.8 x 17.83 in.)
Weight	73.4 kg (161.8 lb)	21.85 kg (48.2 lb)
Paint Tank Capacity	20 L (5.3 gal), expandable to 25 L (6.6 gal)	8 L (2.1 gal)
Marking Speed	3 km/h (1.9 mph)	2 km/h (1.2 mph)
Line Width Range	6–17 cm (2.4–6.7 in.)	5–12 cm (2–4.7 in.)
Nozzle Height	3–11 cm (1.2–4.3 in.)	3–8 cm (1.2–3.1 in.)



PaintMaster Ultra

Precision Anywhere. Perfection Everywhere.

Greater Adaptability in Complex Environments

Maintains reliable line marking across the entire field, even near buildings, grandstands, and other challenging structures.

Millimeter-Level Precision

Designed for elite venues and professional-grade pitches, delivering the precision required for high-level competition.

Engineered for Professional Excellence

Designed to meet professional line-marking standards for major stadiums, sports venues, and training facilities.

Specifications

Dimensions	1074 × 1023 × 672 mm (42.3 × 40.3 × 26.5 in.)
Weight	75 kg (165.3 lb)
Line Width Range	6–17 cm (2.4–6.7 in.)
Line Marking Speed	1–3 km/h (0.6–1.9 mph)
Nozzle Ground Clearance	3–8 cm (1.2–3.1 in.)
Paint Tank Capacity	25 L (6.6 gal)
Battery Capacity	1 kWh
Runtime	8 h
Charging Time	5 h
Positioning	Total Station + GNSS
IP Rating	IPX3





Residential Robotic Mowers



FR4000



FV2000



FL3000



www.ineedrobot.eu



ineedrobot@roboti-adria.eu

FR4000 & FV2000

FR4000 Robotic Mower

For large estates, courtyards, and municipal green spaces

FV2000 Robotic Mower

For small to medium courtyards

Quick Setup

No boundary wires or complicated installation. Simply unbox, complete the setup, and start mowing quickly.

Drop & Run

Create work zones flexibly without being limited by charging-station placement. For separated lawn areas, place the mower in the target area and start the mowing task.

Real-Time Object Detection & Avoidance

With vision perception and multi-sensor detection, the mower can detect people, pets, obstacles, and small animals such as hedgehogs in real time, then adjust its route for a safer, more lawn-friendly mowing experience.

Tackles Inclines up to 33° (65%)

Conquer steep slopes with an impressive 33° climbing ability.

Smart Path Planning

Automatically executes efficient routes to keep your lawn perfectly maintained.





www.ineedrobot.eu



ineedrobot@roboti-adria.eu

FL3000

LiDAR-Powered Robotic Mower

For yards with dense trees, walls, tight corners, and weak GPS signals

No Wire. No RTK. 10-Minute Setup

Forget about the hassle of complex setup—simply install the charging station and define the virtual boundaries of your garden via the app.

Reliable in Weak-Signal Areas

Designed for areas with trees, walls, and tight corners. LiDAR technology ensures precise navigation and reliable performance even in the most challenging areas.

Smart Edge Trimming

LiDAR and vision work together to support cleaner edge cutting and reduce the effort required for boundary setup.





FR4000 Robotic Mower

FV2000 Robotic Mower

FL3000 LiDAR Robotic Mower

Mowing Capacity

Recommended Mowing Area	4,000 m² (1 acre)	2,000 m² (0.5 acre)	3,000 m² (0.75 acre)
Max Climbing Ability	33° (65%)	33° (65%)	33° (65%)
Max Mowing Slope	25° (47%)	25° (47%)	25° (47%)

Complete Unit

Technology	RTK + RGB Vision	RTK + RGB Vision	LiDAR + RGB Vision
Weight	13.3 kg (29 lb)	13.2 kg (29 lb)	13.5 kg (30 lb)
Dimensions	645 × 444 × 420 mm (25.4 × 17.5 × 16.5 in.)	634 × 444 × 285 mm (24.9 × 17.5 × 11.2 in.)	633 × 443 × 302 mm (24.9 × 17.4 × 11.8 in.)
Camera	Binocular	Monocular	Monocular
IP Rating	Mower: IPX5; Charging Station: IP65	Mower: IPX5; Charging Station: IP65	Mower: IPX5; Charging Station: IP65

Cutting System

Cutting Height	20–60 mm (0.8–2.4 in.); 10–50 mm (0.4–2 in.)	20–60 mm (0.8–2.4 in.)	20–60 mm (0.8–2.4 in.); 10–50 mm (0.4–2 in.)
Cutting Width	260 mm (10.2 in.)	260 mm (10.2 in.)	260 mm (10.2 in.)

Battery & Charging

Battery Capacity	190 Wh	95 Wh	190 Wh
Runtime per Charge	180 min	120 min	180 min
Charging Time	120 min	60 min	120 min



www.ineedrobot.eu



ineedrobot@roboti-adria.eu



Robotic Mower Solutions



**FJD Professional
Golf Course Robotic Solution**



**FJD Professional
Sports Field Robotic Solution**



FJD Professional

Golf Course Robotic Solution

1

Positioning




FJD Trion N10 CORS System

- Centimeter-level accuracy
- Stable signal coverage
- All-weather reliability



2

Mapping

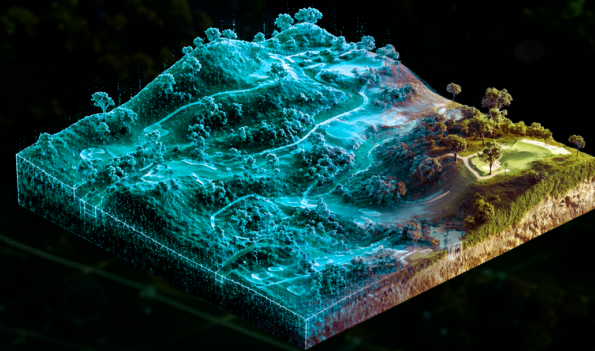

FJD Trion P2 LiDAR Scanner

- High-density point cloud
- 360° LiDAR coverage
- Real-time data capture



3

Mowing



FJD Mowing Solution

- Reliable in weak-signal areas
- Smart path planning
- Multi-zone management



4

Data Management



FJD GolfMind Platform

- Digital twin visualization
- Task scheduling & monitoring
- Data-driven course maintenance decisions



Product Application Map

Fairways

- RCM01 Robotic Cylinder Mower**
Premium robotic mower delivering tournament-quality cuts for fairways.
- Titan Robotic Mower**
The most cost-effective robotic mower for pristine fairways.
- MS200 Pro Mower Kit**
Retrofit your existing mowers for autonomous operation.

Greens/Tees

- GM22S Electric Walk Greens Mower**
Ideal for greens requiring electric mowing.

Golf Driving Ranges

- RM21 + Ball Picker Kit**
Autonomous ball collection robot for golf driving ranges.



Roughs

- RM21 Multi-Functional Robotic Mower**
RM21 + Dew Brush Kit
Versatile mower for large rough areas, with reliable operation under trees.
- FRX Robotic Mower**
Cost-effective rough mower with 30° slope capability for steep terrain.
- Titan Robotic Mower**
Ideal for rough areas requiring low-noise operation.

	RM21	RCM01	Titan	FRX	GM22S
Positioning & Perception	RTK + LiDAR + Vision	RTK + LiDAR + Vision	RTK + LiDAR + Vision	RTK + Vision	/
Cutting Height	20–127 mm (0.8–5 in.)	7–44 mm (0.28–1.73 in.)	10–100 mm (0.4–4 in.)	10–100 mm (0.4–4 in.)	2–20 3–25 5–25 mm (0.08–0.8 0.12–0.98 0.2–0.98 in.)
Cutting Width	635 mm (25 in.)	685 mm (27 in.)	730 mm (28.7 in.)	520 mm (20.5 in.)	559 mm (22 in.)
Mowing Slope	15°	15°	25°	30°	/
Mowing Time per Charge	Up to 5h	Up to 10h	Up to 8h	Up to 5.3h	Up to 6h
24 h Coverage (Acres)	Up to 9 (Auto-Docking)	Up to 12 (Battery Swap)	Up to 10.4 (Battery Swap) Up to 9 (Auto-Docking)	Up to 8 (Battery Swap) Up to 5 (Auto-Docking)	Up to 1.4 (Single Charge)




FJD Professional

Sports Field Robotic Solution

1

Positioning

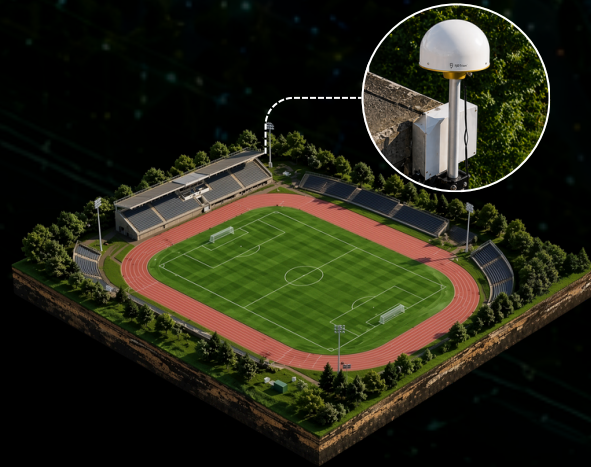


FJD Trion N10 CORS System

- Centimeter-level accuracy
- Stable signal coverage
- All-weather reliability



2

Mapping

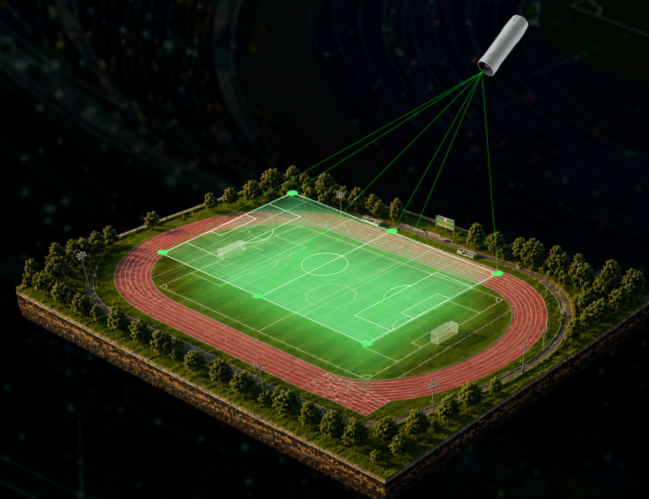

FJD Trion V4e Pro

- Centimeter-level RTK positioning
- Lightweight handheld mapping
- Real-time field preview



3

Mowing & Line Marking



FJD Robotic Mower & Line Marker

- Autonomous operation
- Smart path planning
- Precision mowing & marking




4

Data Management



FJD GreenMaster Platform

- Digital twin visualization
- Task scheduling & monitoring
- Virtual path preview before marking





Product Application Map

Mowing System

FRX Robotic Mower

Designed for routine mowing on professional sports fields, with strong slope handling and cost-effective autonomous operation.

Titan Robotic Mower

Built for large sports fields that require high daily mowing capacity. When paired with the line marker kit, Titan also supports precise and efficient line marking.

RM21 + Line Marker Kit Combo

An integrated robotic solution for mowing and line marking across large, multi-field sports venues.

Line Marking System

PaintMaster Pro

Designed for professional events and routine field maintenance, with precise, efficient, and repeatable template-based marking.

PaintMaster Mini

Suitable for schools, clubs, and small to medium-sized venues, offering lightweight handling and everyday efficiency.

PaintMaster Ultra

Designed for premium venues that require high-precision line marking where RTK signals are limited or unavailable.

Cutting System

FRX

Titan

RM21

Line Marking System

LM01

PaintMaster Pro

PaintMaster Mini

PaintMaster Ultra

Positioning & Perception

RTK + Vision

RTK + LiDAR + Vision

RTK + LiDAR + Vision

Max Marking Speed

3 km/h (1.9 mph)

3 km/h (1.9 mph)

2 km/h (1.2 mph)

3 km/h (1.9 mph)

Max Coverage in 72h

96,000 m² (23.7 acres)

108,000 m² (26.7 acres)

108,000 m² (26.7 acres)

Line Width Range

5–17 cm (2–6.7 in.)

6–17 cm (2.4–6.7 in.)

5–12 cm (2–4.7 in.)

6–17 cm (2.4–6.7 in.)

Cutting Height

10–100 mm (0.4–4 in.)

10–100 mm (0.4–4 in.)

20–127 mm (0.8–5 in.)

Nozzle Height

5–17 cm (2–6.7 in.)

3–11 cm (1.2–4.3 in.)

3–8 cm (1.2–3.1 in.)

3–11 cm (1.2–4.3 in.)

Cutting Width

520 mm (20.5 in.)

730 mm (28.7 in.)

635 mm (25 in.)

Paint Tank Capacity

25 L (6.6 gal)

20 L (5.28 gal)

8 L (2.11 gal)

25 L (6.6 gal)

Mowing Time per Charge

5.3h

8h

5h

Operating Time per Charge

20h

5h

1.5h

8h

FJD Professional

Sports Field Robotic Solution




www.ineedrobot.eu



ineedrobot@roboti-adria.eu

Sports Field Digital Twin Solution

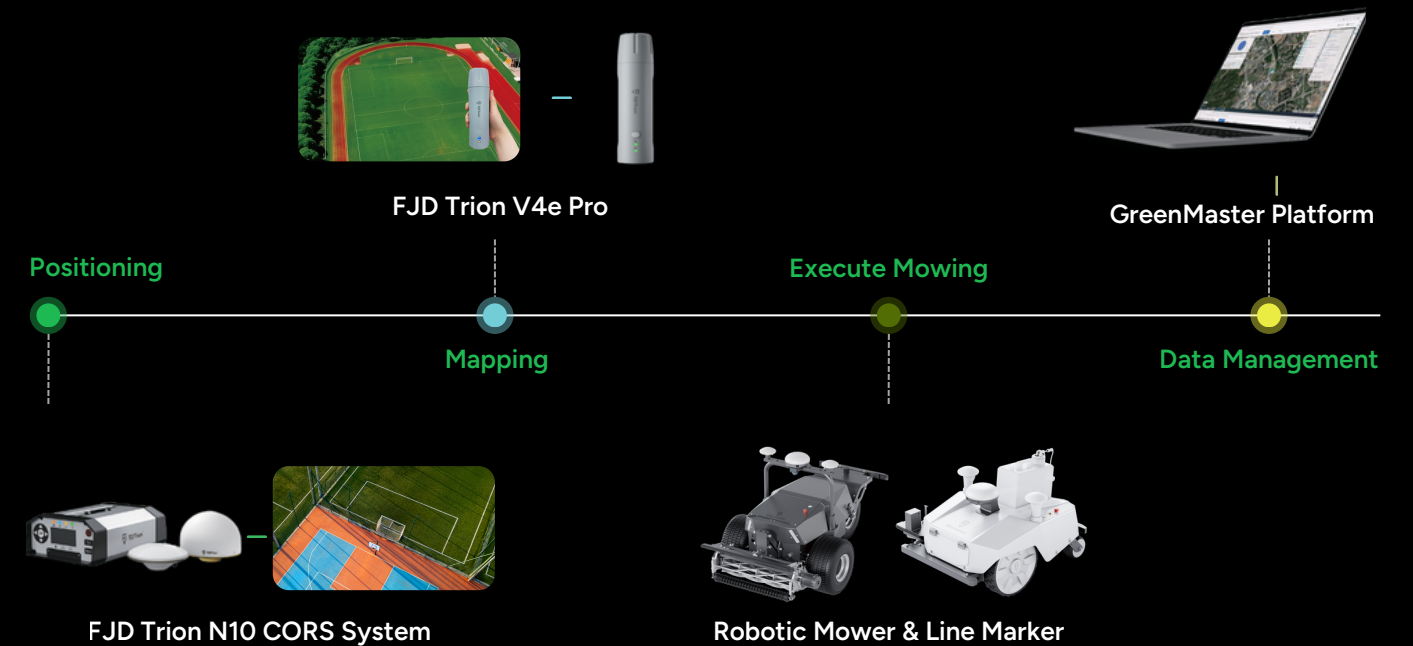

FJD PaintMaster Simulator

With the FJD PaintMaster Simulator, users can preview marking paths virtually before starting the task, helping reduce setup errors and save time. For both beginners and experienced operators, the simulator makes the marking workflow easier to understand, plan, and execute with greater accuracy.





Cutting System



FRX Robotic Mower

Suitable for routine mowing on professional sports fields, with strong value, slope adaptability, and continuous unmanned operation.



Titan Robotic Mower

Built for large sports fields with high-output daily maintenance, and delivers precise, efficient line marking when paired with the line marker kit.



RM21 Multi-Functional Robotic Mower

Serves as a multifunctional platform for daily turf maintenance and supports additional field care tasks through expandable kits.

Marking System



PaintMaster Pro

Suitable for high-standard professional events and high-frequency maintenance scenarios, with precision, efficiency, and template-based repeatability.



PaintMaster Mini

Suitable for schools, clubs, and small to medium-sized venues, with lightweight handling, convenience, and everyday efficiency.



PaintMaster Ultra

Suitable for premium event venues and high-precision line marking needs in RTK-challenged environments.

Cutting System	FRX	Titan	RM21
Positioning & Perception	RTK+Vision	RTK+LiDAR+Vision	RTK+LiDAR+Vision
Max Coverage in 72h	96,000 m²(23.7 acres)	108,000 m²(26.7 acres)	108,000 m² (26.7 acres)
Cutting height	10–100 mm (0.4–4 in.)	10–100 mm (0.4–4 in.)	0–127 mm (0.8–5 in.)
Cutting width	520 mm (20.5 in.)	730 mm (28.7 in.)	635 mm (25 in.)
Mowing time per charge	5.3h	8h	5h

Line Marking System	LM01	PaintMaster Pro	PaintMaster Mini	PaintMaster Ultra
Max Marking Speed	3km/h (1.9 mph)	3 km/h (1.9 mph)	2 km/h (1.2 mph)	3 km/h (1.9 mph)
Line Width Range	5–17 cm (2–6.7 in.)	6–17 cm (2.4–6.7 in.)	5–12 cm (2–4.7 in.)	6–17 cm (2.4–6.7 in.)
Nozzle height	5–17 cm (2–6.7 in.)	3–11 cm (1.2–4.3 in.)	3–8 cm (1.2–3.1 in.)	3–11 cm (1.2–4.3 in.)
Tank Capacity	25 L (6.6 gal)	20 L (5.28 gal)	8 L (2.11 gal)	25 L (6.6 gal)
Operating Time per Charge	20h	5h	1.5h	8h

FJD Professional

Golf Course Robotic Solution

Smart Turf Management for Golf Courses

FJD is redefining golf course maintenance with a full lineup of intelligent robotic mowers designed for every turf zone.



No Signal Worries

RTK combined with LiDAR or Vision ensures reliable performance even under trees.



Scan Once. Automate It All


Map in minutes with the FJD Trion P2 LiDAR Scanner. Create a digital asset shared across your entire fleet.



Multi-Zone Management


Automated multi-field mowing with seamless transitions between task areas.

GreenMaster Platform Integration

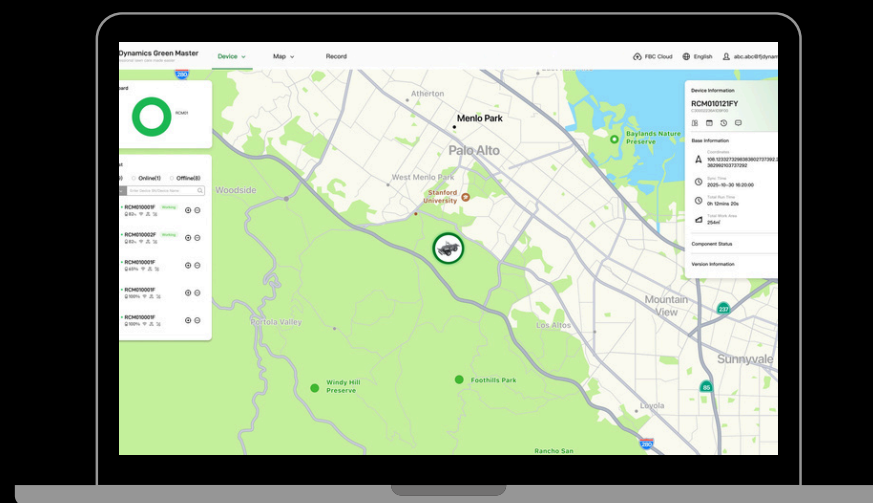

Boundary Definition Task Scheduling Digital Operations

Golf Course Digital Twin Solution

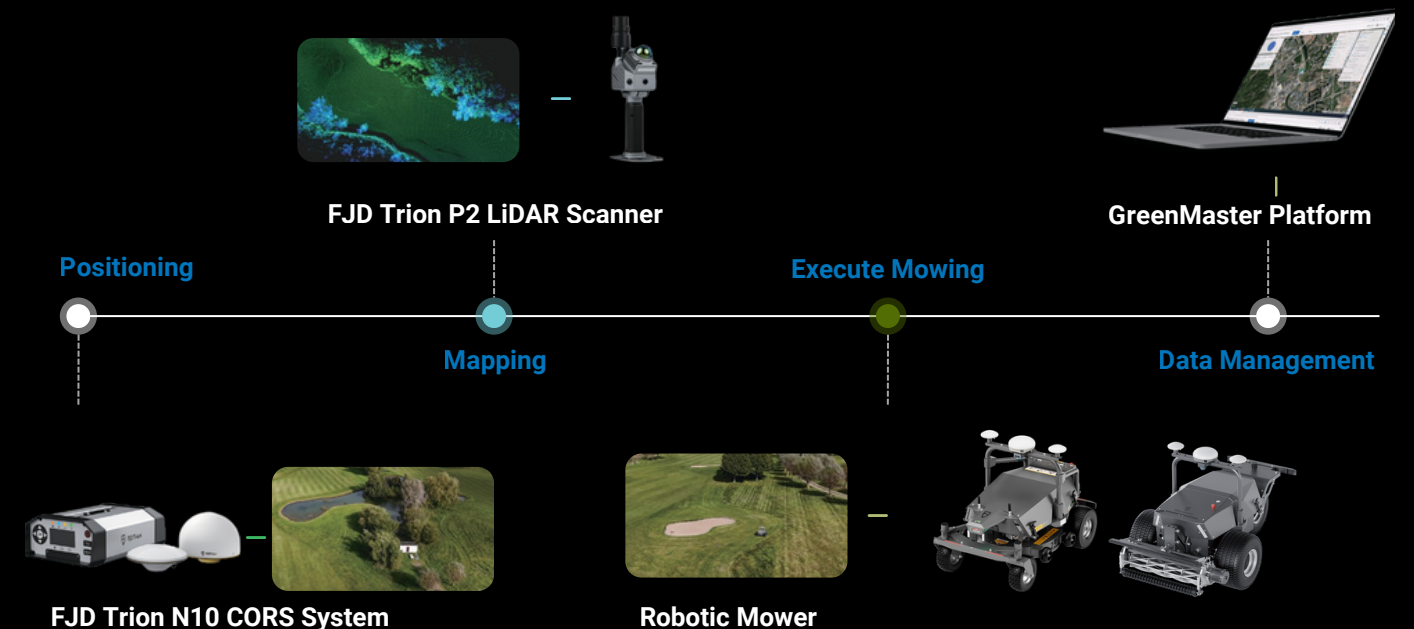



Golf Driving Ranges



RM21 + Ball Picker Kit
Autonomous ball collection robot for golf driving ranges.

Roughs



RM21 Multi-Functional Robotic Mower
Versatile mower for large rough areas, with reliable operation under trees.



RM21 + Dew Brush Kit



FRX Robotic Mower
Cost-effective mower for rough maintenance, built to handle slopes up to 30°.



Titan Robotic Mower
Ideal for rough areas requiring low-noise operation.

Fairways



RCM01 Robotic Cylinder Mower
Premium robotic mower delivering tournament-quality cuts for fairways.



Titan Robotic Mower
The most cost-effective robotic mower for pristine fairways.



MS200 Pro Mower Kit
Retrofit your existing mower into an autonomous solution.

Greens/Tees



GM22S Electric Walk Greens Mower
Ideal for greens and tees requiring low-noise electric mowing.

	RM21	RCM01	Titan	FRX	GM22S
Positioning & Perception	RTK+LiDAR+Vision	RTK+LiDAR+Vision	RTK+LiDAR+Vision	RTK+Vision	/
Cutting height	20–127 mm (0.8–5 in.)	7–44 mm (0.28–1.73 in.)	10–100 mm (0.4–4 in.)	10–100 mm (0.4–4 in.)	2–20 3–25 5–25 mm (0.08–0.8 0.12–0.98 0.2–0.98 in.)
Cutting width	635 mm (25 in.)	685 mm (27 in.)	730 mm (28.74 in.)	520 mm (20.5 in.)	559 mm (22 in.)
Mowing Slope	15°	15°	25°	30°	/
Mowing time per charge	Up to 5h	Up to 10h	Up to 8h	Up to 5.3h	Up to 6h
24 hr Coverage (Acres)	Up to 9 (Auto-Docking)	Up to 12 (Battery Swap)	Up to 10.4 (Battery Swap) Up to 9 (Auto-Docking)	Up to 8 (Battery Swap) Up to 5 (Auto-Docking)	Up to 1.4 (Single Charge)

RM21 + LM01 Line Marker Kit

- One-Tap Autonomous Operation
- Seamless Line Marking Resume
- Less Input, Greater Output

Reduce paint usage by 50%
Cut labor costs by up to 90%
Mark up to 20 full-size fields per charge



RM21 + BP01 Ball Picker Kit

- Full-Basket Detection & Auto-Return
- Cloud Scheduling for Full-Course Coverage
- Cut Manual Work Across the Range



RM21 + GC01 Grass Collector Kit

- Automated Grass Collection & Disposal
- Debris Collection on Artificial Turf
- Professional Turf Striping



RM21 + DB01 Dew Brush Kit

- Automatic Lifting and Folding
- Customizable Brushing Direction
- Dew Brushing for Consistent Ball Roll



LM01 Specifications

Weight	68 kg (150 lb)
Dimensions	684 × 562 × 432 mm (27 × 22.1 × 17 in.)
Max marking speed	3 km/h (1.9 mph)
Paint tank capacity	25 L (5.5 gal)
Line width range	50–170 mm (2–6.7 in.)
Nozzle height	30–80 mm (1.2–3.1 in.)
Max marking time per charge	20 h
IP rating	IPX4
Operating temperature	5–35°C



BP01 Specifications

Weight	70 kg (154 lb)
Dimensions	1480 × 1120 × 590 mm (58.3 × 44.1 × 23.2 in.)
Picking width	900 mm (35.4 in.)
Basket count	2
Capacity per basket	400 golf balls



GC01 Specifications

Weight	100 kg (220 lb)
Dimensions	1260 × 960 × 740 mm (49.6 × 37.8 × 29.1 in.)
Grass collection height	20–50 mm (0.8–2 in.)
Collection width	800 mm (31.5 in.)
Max travel speed	3 km/h (1.9 mph)
Max collection volume	150 L (33 gal)
Max climbing ability	8°
IP rating	IPX4
Operating temperature	0–45°C



DB01 Specifications

Weight	28 kg (61.7 lb)
Length – Single section	1000 mm / 39.4 in.
Length – Three sections	2930 mm / 115.4 in.
Brush lift	Supported
Brush folding	Supported





ineedrobot@roboti-adria.eu

www.ineedrobot.eu

Roboti Adria Group, d. o. o.

Dunajska cesta 158, 1000 Ljubljana, Slovenia